

NSCRx Cable Reel

NSCRx | Cable Reel with Slip Contact

NOVASUB supplies cable reels that fit the standard NOVASUB DLR3 and DLR4 cables. The cable reels are made from plastic and rubber. The reel is fitted on the back with a multipin bulkhead connector for quick connection of a patch cable to NOVASUB Surface control units.

The cable reels can be supplied empty or with any cable. The cable is connected inside the drum on a 12 pins screw terminal block. The cable drum is fully weather proof.



MCIL4F / 4 Pin Connector
Female

Configurations :

- NSCR310-1
- NSCR380-1
- NSCR450-1
- NSCR485-1
- NSCR582-1

Features:

- Lightweight
- Low cost
- Built in 12x slip contact

Applications:

- CCTV Systems
- Data Transmission
- Towed Systems

website link : <https://www.novasub.com/product/nscr-cable-storage-reel/>


product video : <https://www.youtube.com/channel/UCRqqqmJy8O7XEabp7S1rpQ>

NSCRx Cable Reel

Specifications :

Models	NSCR310-1	NSCR380-1	NSCR450-1	NSCR485-1	NSCR582-1
Description	Hand reel				
Cable Capacity DLR3 / 4	40 m	75 m	100 m	300 m	300 m
Material	Plastic / Rubber			Plastic /Steel	
Connector	UTS 10 pin, standard others optional				
Cable terminal	Inside drum 12 contact screw terminal				
Slip contacts	12 contacts, gold-gold, 240 vac@2A per contact				
Dim. (mm)	310x360x290	380x485x330	440x560x350	460x545x350	580x710x310
Weight (kg)	4	5	7	10	10
Diameter drum	Ø 170 mm	Ø 236 mm	Ø 295 mm	Ø 178 mm	Ø 320 mm
Diam. flange	Ø 310 mm	Ø 380 mm	Ø 445 mm	Ø 460 mm	Ø 580 mm
Width drum	112mm	166 mm	177 mm	210 mm	170 mm
Brake	Screw brake to hold drum in position				
Optional	Cable pay-out sensor, 24 slip contact, transport case				
Torque (motor)	NA				
Cable Capacity (cable diameter/ Max. spool length)	Ø 3mm = 638m	Ø 3mm = 1267m	Ø 3mm = 1711m	Ø 3mm = 3395m	Ø 3mm = 3395m
	Ø 5mm = 231m	Ø 5mm = 443m	Ø 5mm = 609m	Ø 5mm = 1246m	Ø 5mm = 1246m
	Ø 7mm = 120m	Ø 7mm = 220m	Ø 7mm = 290m	Ø 7mm = 609m	Ø 7mm = 609m
	Ø 10mm = 57m	Ø 10mm = 107m	Ø 10mm = 138m	Ø 10mm = 311m	Ø 10mm = 311m
	Ø 12mm = 33m	Ø 12mm = 74m	Ø 12mm = 97m	Ø 12mm = 197m	Ø 12mm = 197m
	Ø 15mm = 21m	Ø 15mm = 42m	Ø 15mm = 63m	Ø 15mm = 124m	Ø 15mm = 124m
	Ø 17mm = 18m	Ø 17mm = 34m	Ø 17mm = 46m	Ø 17mm = 98m	Ø 17mm = 98m
	Ø 20mm = 11m	Ø 20mm = 23m	Ø 20mm = 27m	Ø 20mm = 67m	Ø 20mm = 67m
Models without slip contacts	NSCR310-2	NSCR380-2	NSCR450-2	NSCR485-2	NSCR582-2
Optional Case	CCR5833	CCR5833	CCR7641	CCR7641	CCR10840

Cable reel cable assembly (custom made to client specifications)

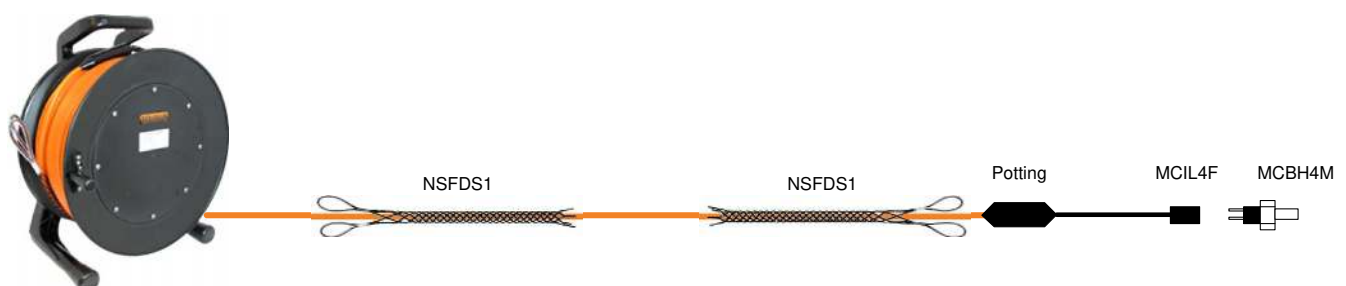

NOVASUB Available products that can be used in combination with NSCRx :

THALLASA



VIDEO RECORDERS

ARGOS



CAMERAS

HELIOS



LIGHTS

HERMES



COMMS

THETIS



DIVER COMMUNICATION

DUx



UMBILICALS

DLRx & CDURx



CABLES
for video & comms

UDS



DEPTH SENSOR

ACCESSORIES Compatible with NSCRx :

FLEETERS



CABLE FLEETER