


NSFDx Fleeters

NSFDX | Fleeters for Umbilicals & Cables

NOVASUB pulling fleets for diver umbilicals, hoses, and towing cable applications. The fleeters (Chinese fingers) are made of plastic-coated Aramid fibre strands. These fleeters do not have the metallic fraying as traditional fleeter, thereby eliminating the chance of being injured or causing damage from metallic strands abraded.

Fleeters are available in different sizes & in different types weaves and eyes.

See examples in the last page for the different options.

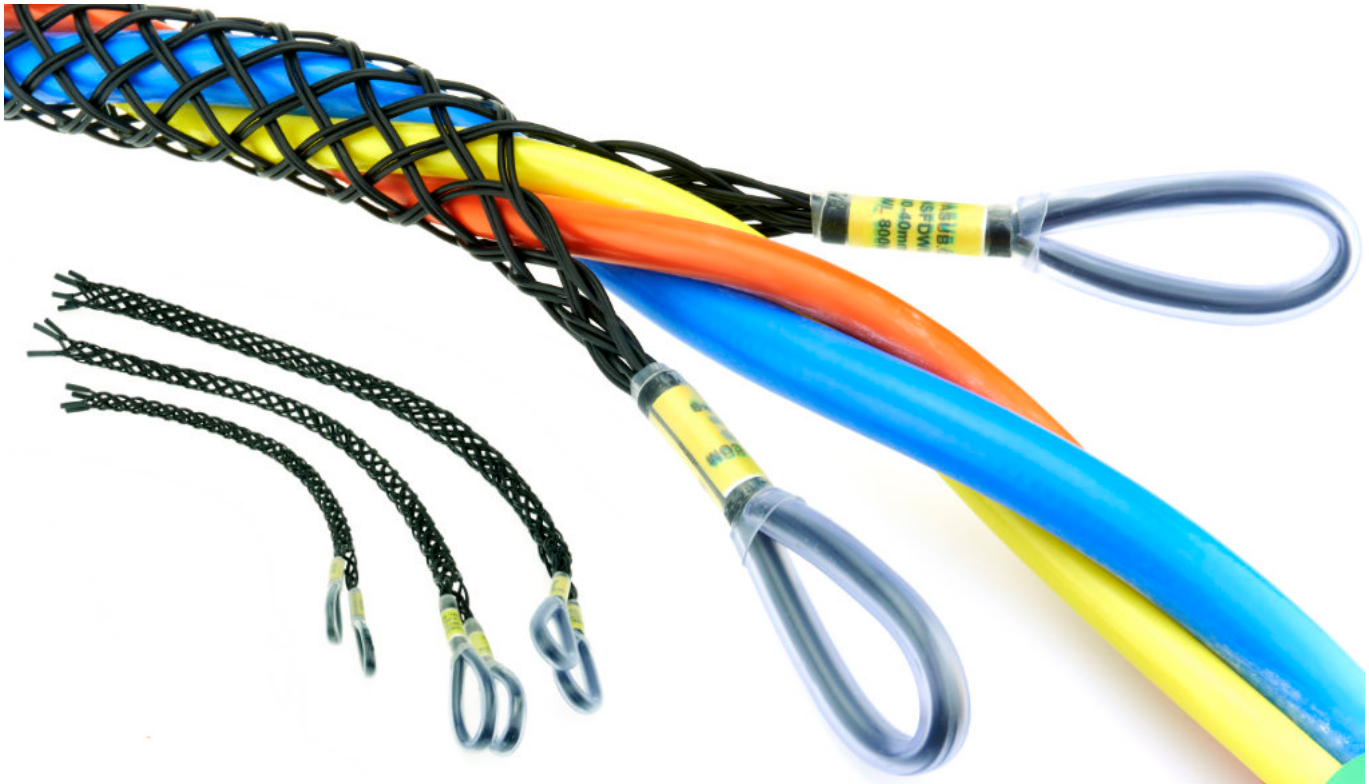

Double Eye | CABLE SIDE



Umbilical Fleeter
double weave



Cable Fleeter
double weave



Configurations :

- NSFDWS1
- NSFDWS2
- NSFDW1
- NSFDW2
- NSFDW3
- NSFDW4
- NSFDW5
- NSFDW6
- NSFDW7
- NSFDW8
- NSFDW9
- NSFDW10

website link : <https://www.novasub.com/product/fleeters-chinese-finger/>

product video : <https://www.youtube.com/channel/UCRqqqmJy8O7XEabp7S1rpQ>

Features:

- Non-Conductive
- Lightweight
- Easy to load and remove
- No wire frays
- No wire cuts

Applications:

- Umbilicals
- Cables

NSFDx Fleeters

Specifications :

SKU	Grip Diameter	Maximum Pass-Through Diameter	Length	Working Load	Break Strength	Eye	Weave	Material	Type
NSFDW1	6-9 mm	13 mm	400 mm	250 kg.	1000 kg.	Double	Single	Aramid	Standard
NSFDWS1	6-9 mm	13 mm	400 mm	250 kg.	1000 kg.	Single	Single	Aramid	Standard
NSFDW1-SS	6-9 mm	17 mm	500 mm	350 kg.	1750 kg.	Double	Single	S/S	Standard
NSFDW2	10-15 mm	16 mm	400 mm	330 kg.	1650 kg.	Double	Double	Aramid	Standard
NSFDWS2	10-15 mm	16 mm	400 mm	330 kg.	1650 kg.	Single	Double	Aramid	Standard
NSFDW2-SS	10-15 mm	16 mm	550 mm	450 kg.	2230 kg.	Double	Double	S/S	Standard
NSFDW2-SS-LU	10-15 mm	16 mm	500 mm	240 kg.	1200 kg.	Double	Double	S/S	Lace-up
NSFDW3	14-25 mm	25 mm	500 mm	500 kg.	2500 kg.	Double	Double	Aramid	Standard
NSFDW3-SS-LU	15-20 mm	20 mm	600 mm	380 kg.	1900 kg.	Double	Double	S/S	Lace-up
NSFDW4	20-30 mm	38 mm	600 mm	580 kg.	2900 kg.	Double	Double	Aramid	Standard
NSFDW5	25-35 mm	42 mm	600 mm	750 kg.	4000 kg.	Double	Double	Aramid	Standard
NSFDWS5	25-35 mm	42 mm	600 mm	750 kg.	4000 kg.	Single	Double	Aramid	Standard
NSFDW6	30-40 mm	44 mm	700 mm	800 kg.	4200 kg.	Double	Double	Aramid	Standard
NSFDW7	40-50 mm	50 mm	700 mm	800 kg.	4200 kg.	Double	Double	Aramid	Standard
NSFDW8	50-60 mm	65 mm	800 mm	1500 kg.	7500 kg.	Double	Double	Aramid	Standard
NSFDW9	60-75 mm	80 mm	800 mm	2000 kg.	10000 kg.	Double	Double	Aramid	Standard
NSFDW10	75-90 mm	100 mm	800 mm	2000 kg.	10000 kg.	Double	Double	Aramid	Standard

Fleeter options:

FLEETER	OPTIONS
Material	Galvanized steel wire
	Stainless Steel wire
	Aramid Plastic covered rope
Diameter	Ø5-450 mm
Length	200-5000 mm
Weave	Double
	Triple
	Open sock
Eye	Single eye end
	Single eye cable side
	Double eye cable side

NOVASUB Available products that can be used in combination with FLEETERS :

DUx



UMBILICALS

DLRx & CDURx



CABLES
for video & comms



NSFDx Fleeters


NSFDX | Fleeters for Umbilicals & Cables | Termination Examples




Double weave




Triple weave

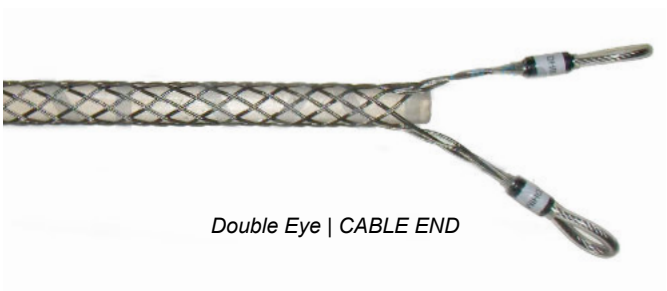

Double Eye | CABLE END

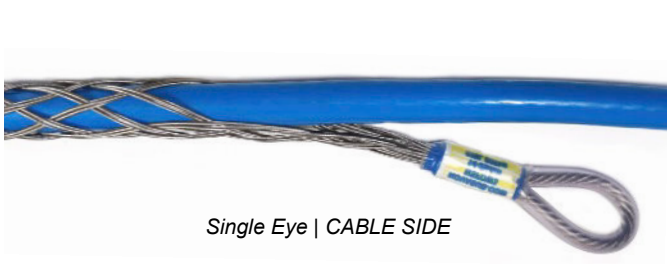

Single Eye | CABLE SIDE

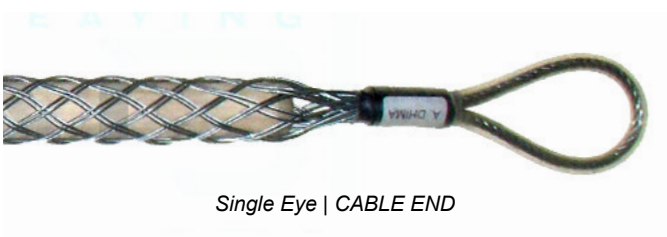

Single Eye | CABLE END



Open sock: wrapped around | OPEN



Open sock: wrapped around | CLOSED